



Capstone MicroTurbine™

CAPSTONE C30 Liquid Fuels


The Product

Features

- Load-following 0-29 kW
- 360-528 VAC, 50/60 Hz
(Stand-alone 360-480 VAC, 10-60 Hz)
3-phase, 3- or 4-wire wye (4-wire for stand-alone)
46ARMS/phase max continuous
- Grid-connect and/or stand-alone
- Maintenance-free air bearings
- No liquid lubricants
- No liquid coolants
- Digital power controller
- Built-in display and user interface
- Built-in protective relays
- Built-in MultiPacking of 2-20-units
(unlimited via grid connect)

Benefits

- Very-low emissions
- Minimal maintenance
- Direct2Grid™ interconnection
- No lubricant or coolant storage, changes, disposal
- Phase-to-phase balance (0-100%) on stand-alone units
- Small footprint
- Vibration-free, quiet operation
- Easy indoor/outdoor/rooftop siting
- Zero hardware arraying (up to 600 kW)
- Optional remote monitoring

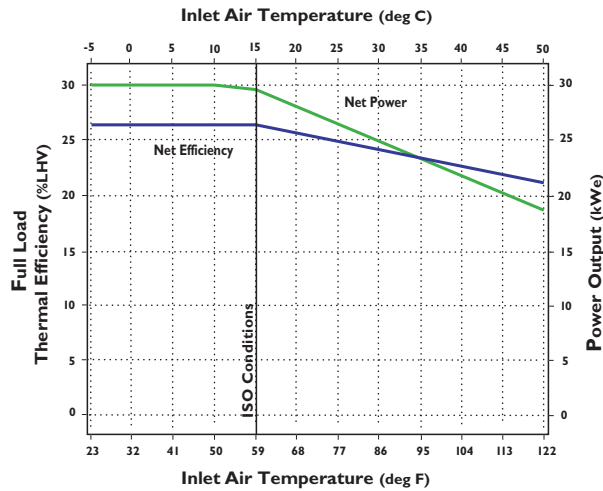

Compliances

- IEEE 519
- CEC Rule 21
- NYPSC DG
- EPA Exempt
- CA AQMD Exempt
- WY DEQ Exempt
- NEMA 3R / IP 14
- Others*



Open and walk-in packaging options also available.

Performance Specifications Under ISO Conditions (15° C / 59° F @ sea level)

Performance @ 50 or 60Hz

Diesel or kerosene**

Full-Load Power

29 kW net (± 1)
38.2 kVA max @ 480 VAC

Efficiency (LHV)

25% (± 2)

Heat Rate (LHV)

14,400 kJ (13,700 Btu) / kWh

Emissions (diesel #2):

NO_x <35 ppmV @ 15% O₂ (<1.9 lb/MWh)

Intake/Exhaust

Fuel flow 459,000 kJ/hr (435,000 Btu/hr)
Exhaust gas temperature 275°C (530°F)
Mass flow 0.31 kg/s (0.68 lb/s)
Total exhaust energy 327,000 kJ/hr (310,000 Btu/hr)

Dimensions

H: 1943mm (76.5")
W: 762mm (30")
D: 1516mm (59.7")

Weight

405 kg (891 lb)
Add 173 kg (380 lb) for stand-alone option

Sound

65dBA @ 10 m (33 ft)
58dBA @ 10 m (33 ft) with optional silencer


CE L_{WA} 98 compliant

* See www.microturbine.com/compliance for detail

**ASTM D975 diesel #2-D; ASTM D3699 kerosene #1-K. Inlet pressure: 34.5 to 68.9 kPag (5 to 10 psig).

The manufacturer reserves the right to change or modify, without notice, the design or equipment specifications without incurring any obligation either with respect to equipment previously sold or in the process of construction. The manufacturer does not warranty the data on this document. Warrantied specifications are documented separately.

Capstone C30 MicroTurbine System

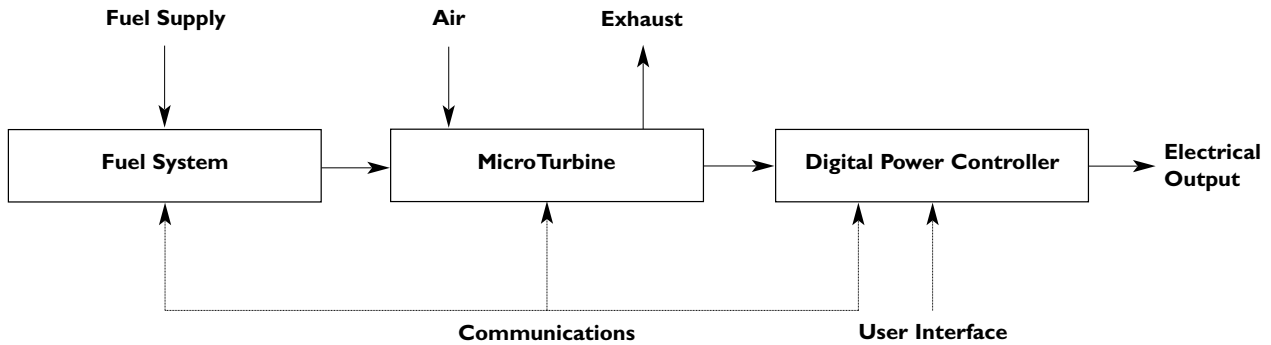


The Capstone C30 MicroTurbine system is a compact, ultra-low-emission generator providing up to 30 kW of power and 85 kW of heat for combined heat and power applications. Solid-state patented power electronics permit 0-30 kW load following, safe zero-hardware Direct2Grid™ interconnection, advanced communications and 2-to-20-unit stand-alone MultiPacking with no external hardware except computer cables. Automatic grid/stand-alone switching, 100-unit PowerServer™ networking, remote monitoring/dispatch and other functionalities are available Capstone options.

The system incorporates a compressor, recuperator, combustor, turbine and permanent magnet generator. The rotating components are mounted on a single shaft, supported by air bearings, that spins at up to 96,000 rpm. This is the only moving part of the microturbine. The generator is cooled by inlet air flow. The system uses no oil, no lubricants, no coolants and has no pumps, gearbox or other mechanical subsystems. The system achieves ultra-low NO_x performance with no post-combustion catalysts or other exhaust cleanup devices. System output is variable frequency (50/60 Hz) 3-phase AC power.



A natural gas fueled 60-kW model and other 30-kW models are also available.

The Capstone C30 MicroTurbine Generator

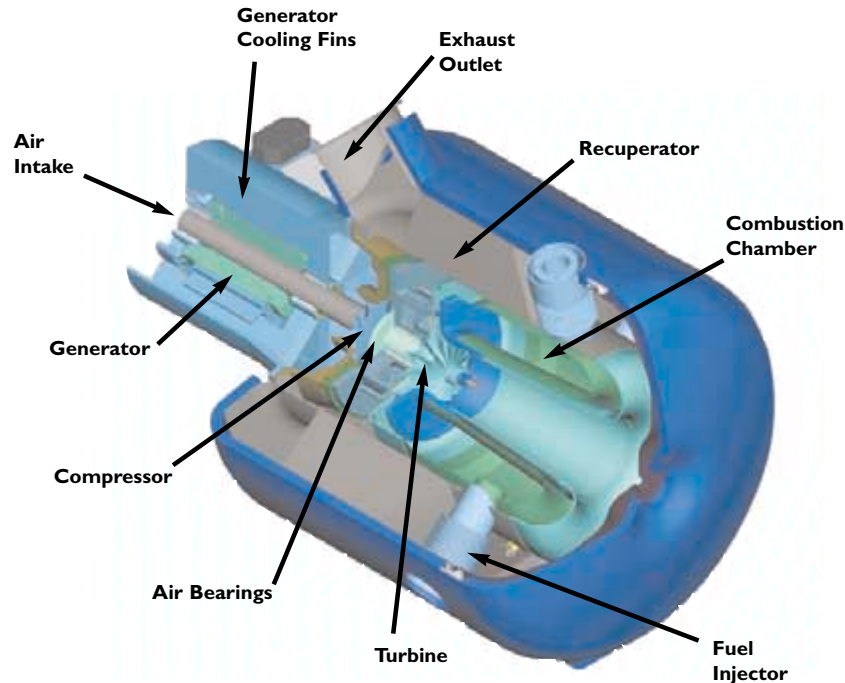

CAPSTONE TURBINE CORPORATION
REGISTERED TO ISO 9001
FILE NUMBER A9549



CAPSTONE TURBINE CORPORATION

21211 Nordhoff Street, Chatsworth, CA 91311 Phone: 818-734-5300 Fax: 818-734-5320

www.microturbine.com